


## No. 882 LAMP ATTACHMENT Mounting Instructions

The No. 882 Lamp Attachment consists of an 8-foot 2-wire rubber covered electric cord with plug, socket, lamp shade, mounting bracket, adjustable support links and screws.

Parts of the attachment may be identified from Fig. 1, which shows the supporting links and mounting bracket completely assembled to the lamp shade. Screws for fastening the bracket to wood or metal surfaces are included.

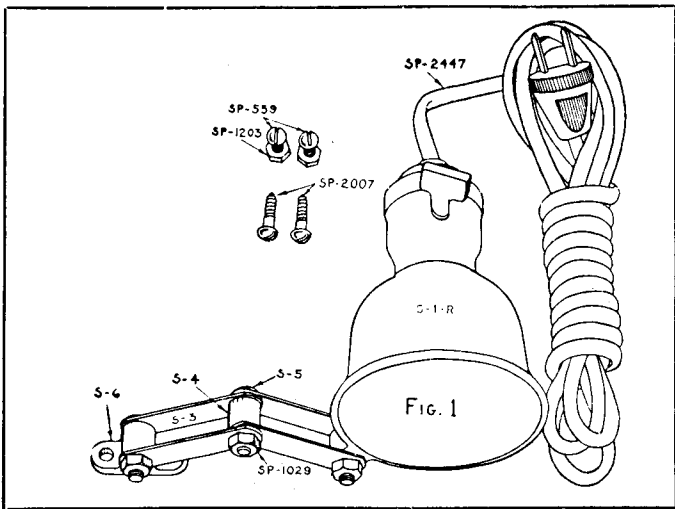

The shade is designed to take 15 or 25 watt lamps. These sizes furnish sufficient light for most purposes, as the lamp can be adjusted to the best position for illuminating the work. Frosted lamp bulbs are most satisfactory because of minimum glare.


### ATTACHING LAMP TO MACHINE

Delta machines for which this attachment is especially desirable have a mounting lug designed to hold the lamp in a convenient position directly above the work. These machines are the 14" Drill Press, 14" Band Saw, 24" Scroll Saw, Super-Hi-Speed Drill Press, Homecraft 11" Drill Press, Homecraft 10" Band Saw and Homecraft 16" Scroll Saw.

Use the adjustable links to fasten the lamp shade on the mounting lug as shown in Fig. 2. Both pair of links may be used, if desired, to give the lamp greater range of adjustment.

Use the bracket S-6 for attaching the lamp to machines which do not have the mounting lug. Mark

the location of holes from the bracket. Use a # 10 drill for through holes in metal and fasten the bracket by means of the round head machine screws SP-559. Drill # 24 holes when the bracket is to be fastened on thick metal and tap with # 10-32 thread to receive the mounting screws.

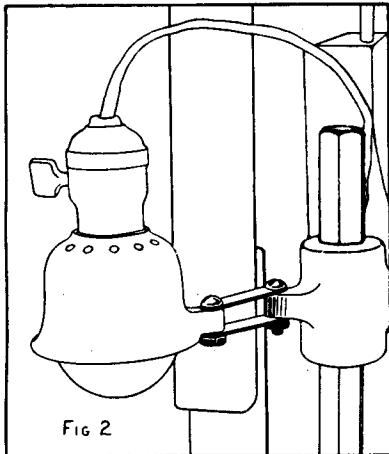

When mounting the lamp on a wooden member, use the round head wood screws SP-2007. The lamp can be used to good advantage for many locations in the shop where concentrated illumination is required on machines or at the work bench. Extra support links can easily be added to extend the range of adjustment when required.

### TABLE 1. REPLACEMENT PARTS

Important: Give both the Part Number and the Description of each item when ordering from this list.

| Part No.                              | Description  | Number Required |
|---------------------------------------|--|-----------------|
| <b>LAMP SHADE AND CORD</b>            |  |                 |
| S-1-R                                 | Lamp Shade, with Deflecting Washer and Set Screws . . .          | 1               |
| S-2                                   | Special 1 1/2" Steel Washer, 2 1/8" O.D. x 3/64" Thick . . . . . | 1               |
| J-44                                  | Special #8-32 x 1/16" Headless Set Screw, Flat Point . . . . .   | 2               |
| SP-2447                               | 2-Wire Lamp Cord, 8' Long, with Plug and Socket . . . . .        | 1               |
| <b>BRACKET AND ADJUSTABLE SUPPORT</b> |  |                 |
| S-3                                   | Steel Link, 1/16 x 1/2 x 2 1/4", Square Holes . . . . .          | 4               |
| S-4                                   | Spacing Sleeve, 1 7/64" I.D., 1/2" O.D. x 1/16" Long . . . . .   | 1               |
| S-5                                   | Special 1/4-20 x 1 5/16" Carriage Bolt . . . . .                 | 3               |
| S-6                                   | Mounting Bracket . . . . .                                       | 1               |
| SP-559                                | #10-32 x 1/2" Round Head Machine Screw . . . . .                 | 2               |
| SP-1029                               | 1/4"-20 Hexagon Nut . . . . .                                    | 3               |
| SP-1203                               | #10-32 Hexagon Nut . . . . .                                     | 2               |
| SP-1702                               | 1/4" Split Lockwasher . . . . .                                  | 3               |
| SP-2007                               | #10 x 3/4" Round Head Wood Screw . . . . .                       | 2               |

CONSULT YOUR DELTA DEALER FOR PRICES OF REPLACEMENT PARTS, ACCESSORIES AND TOOLS TO FACILITATE HANDLING WE SUGGEST ORDERING ALL PARTS THROUGH YOUR DELTA DEALER

The right is reserved to make changes in design or equipment at any time without incurring any obligation to install these on machines previously sold, and to discontinue models of machines, motors or accessories at any time without notice.



## Rockwell MANUFACTURING COMPANY

DELTA POWER TOOL DIVISION      PITTSBURGH 8, PENNSYLVANIA